
RR-PRF-75-03

MULTI-FUNCTIONAL TRAINER

# **OWNER'S MANUAL**

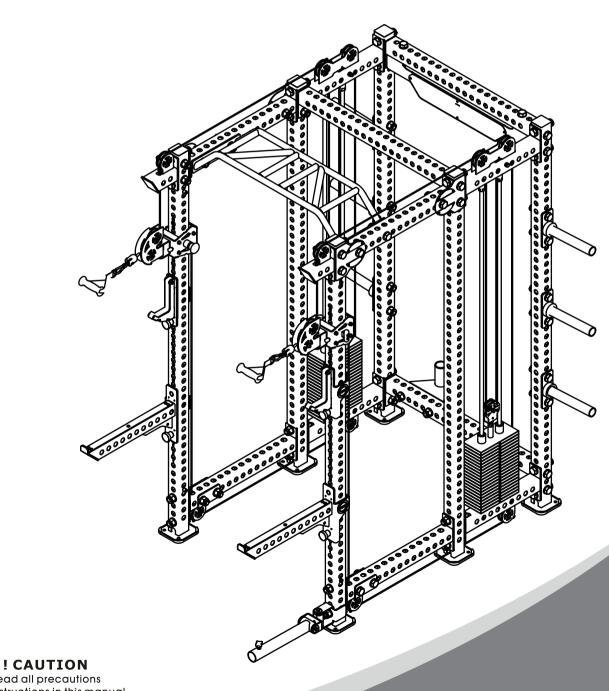

Read all precautions and instructions in this manual before using this equipment Read all precautions and instructions in this manual before using this equipment.

# Table Of Contents

Important Safety Instructions	3
Instructions	4
Parts List	5
Exploded View	6
Measurement Guide	7
Assembly Instructions	8
Assembly	9
Maintenance Schedule	13
General Maintenance Information	14
Weight Training Tips	15

## **Important Safety Instructions**

Before beginning any fitness program, you should obtain a complete physical examination from your physician. When using exercise equipment, basic precautions should always be taken, including the following:

- 1. Read all instructions before using the equipment.

  These instructions are written to ensure your safety and to protect the unit.
- 2. Use the equipment only for its intended purpose as described in this guide. Do not use accessory attachments that are not recommended by the manufacturer: such attachments might cause injuries.
- 3. The product should only be used on a level surface and is with 0.5 meters space around the product.


  Do not use the equipment outdoors.
- 4. Do not allow children on or near the equipment. And children are not allowed to use this equipment.
  - Teenagers should use this equipment with adult supervision.
- 5. Do not overexert yourself or work to exhaustion.Do not attempt to lift more weight than you can control safely.If you feel any pain or abnormal symptoms, stop your workout immediately and consult your physician.
- 6. This equipment is not used as medical apparatus and instruments.
- 7. Never operate the unit when it has been dropped or damaged. Never drop or insert anything into any opening in the equipment. Always check the unit and its cables before each use. Make sure that all fasteners and cables are secure and in good working condition. Frayed or worn cables can be dangerous and may cause injury. Periodically check these cables for any indication of wear. Keep hands, limbs, loose clothing and long hair well out of the way of moving parts.
- 8. Be careful when getting on or off the equipment.
- 9. Wear proper exercise clothing and shoes for your workout, no loose clothing.

### Instructions

Before beginning assembly please take the time to read instructions thoroughly. Please use the various lists in this manual to make sure that all parts have been included in your shipment. When ordering, use part number and description from the lists. Use only our replacement part when servicing. Failure to do so will void your warranty and could result in personal injury.

The equipment is designed to provide the smoothest, most effective exercise motion possible. After assembly, you should check all functions to ensure correct operation. If you experience problems, first recheck the assembly instructions to locate any possible errors made during assembly. If you are unable to correct the problem, call your authorized dealer. Be sure to have your serial number and this manual when calling. When all parts have been accounted for, continue on.


## **Tools Required**



Ratchet Wrench and Socket




Adjustable Wrench



Rubber Mallet



Hex Key Wrench Set




Phillips Screwdriver


# Parts List

### NOTE: SOME OF THESE PARTS MAY COME PRE-INSTALLED.

Item No.	Description	QTY	Item No.	Description	QTY
1	Adjustable Frame	2	21.5	Double pulley frame shaft	1
2	Upright Frame	4	21.6	Bush Φ28×Φ22×Φ16×18	2
3	Long Cross Brace	4	21. 7	Pulley	2
4	Cross Brace	3	21.8	Stop Collar ∲18×14	2
5	Cannon Barrel Accessories	1	21.9	Small adjustment handle	
6	Pull Frame	1	21. 1	Roller Spacer Sleeve	8
7	Barbell Bar Rack	6	21.11	Socket Head Cap Screw M8×120	4
8	Fixed Plate 1016×150×69×4	1	21. 12	Socket Head Cap Screw M8×100	1
9	Barbell Placement Rack	1	21. 13	Nylon Lock Nut M8	5
9.1	Barbell Placement Rack	1	21. 14	Flat Washer φ9×φ16×1.6	10
9.2	Bush $\phi 60 \times 52.5 \times 63$	1	21.15	Bearing 608-2Z	8
9.3	Rubber Pad ∲53×3	1	21.16	Nylon Lock Nut M10	2
10	Right Safety Arm	1	21. 17	Hex Head Bolt M10×50	2
10.1	Right Safety Arm	1	21. 18	Flat Washer φ11×φ20×2	4
10.2	Long Plastic Board 603×41×5	1	21. 19	Flat Head Cap Screw M6×30	2
10.3	Pin Shaft	1	22	Low pulley frame	2
10.4	LOGO Board φ74×1.5	1	23	Left pulley assembly	1
10.5	Plastic Sheeting 255×62×5	1	23. 1	Double Pulley Frame	1
10.6	Plastic Sheeting 52×44×5	2	23. 2	Carriage	1
10.7	Flat Head Cap Screw M6×10	13	23. 3	Pop Pin	1
10.8	Button Head Cap Screw M4×4	2	23. 4	Roller φ42×95	4
11	Left Safety Arm	1	23. 5	Stop Collar φ18×14	2
11.1	Left Safety Arm	1	23. 6	Small adjustment handle	1
11. 2	Long Plastic Board 603×41×5	1	23. 7	Roller Spacer Sleeve	8
11. 3	Pin Shaft	1	23. 8	Bearing 608-2Z	8
11. 4	LOGO Board $\phi$ 74×1.5	1	23. 9	Nylon Lock Nut M10	5
11. 5	Plastic Sheeting 255×62×5	1	23. 1	Socket Head Cap Screw M8×120	4
11.6	Plastic Sheeting 52×44×5	2	23. 11	Flat Washer $\phi 11 \times \phi 20 \times 2$	10
11. 7	Flat Head Cap Screw M6×10	13	23. 12	Flat Head Cap Screw M6×30	2
11. 8	Button Head Cap Screw M4×4	2	23. 13	Pulley	2
12	Right Hook	1	23. 14	Nylon Lock Nut M10	2
	*	1		•	2
12. 1 12. 2	Right Hook	1	23. 15 23. 16	Hex Head Bolt M10×50 Flat Washer φ11×φ20×2	4
	Pin Shaft	1			_
12. 3 12. 4	LOGO Board \$\phi 74 \times 1.5	1	23. 17 23. 18	Double pulley frame shaft	1 2
	Right hook 241.3×153.8×25.7	_		Bush \$\phi 28 \times \phi 22 \times \phi 16 \times 18	_
12. 5	Plastic Sheeting 255×62×5	1	23. 19	Socket Head Cap Screw M8×100	1
12.6	Plastic Sheeting 52×44×5	2	24	Guid Rod ∲19×2058	4
12. 7	Flat Washer $\phi 9 \times \phi 16 \times 1.6$	2	25	Cable	2
12. 8	Button Head Cap Screw M8×50	1	26	Pulley frame	2
12. 9	Nylon Lock Nut M8	1	27	Top Plate 5Kg	2
12. 1	Flat Head Cap Screw M6×10	8	28	Aluminum blocking plate φ42.9×6	6
12.11	Button Head Cap Screw M4×4	2	29	Guide rod positioning axis	4
13	Left Hook	1	30	Hulu Hook	2
13. 1	Left Hook	1	31	Flange nut M12	4
13. 2	Pin Shaft	1	32	Tensile sleeve set	2
13. 3	LOGO Board Φ74×1.5	1	33	Pulley	14
13.4	Right hook 241.3×153.8×25.7	1	34	Ground floor mat	6
13.5	Plastic Sheeting 255×62×5	1	35	Rubber pad φ63.5×φ19×25.4	4
13.6	Plastic Sheeting $52 \times 44 \times 5$	2	36	Spacer φ76.2×φ47.9×25.4	6
13.7	Flat Washer Φ9×Φ16×1.6	2	37	Spacer sleeve φ17×φ8.2×18	4
13.8	Button Head Cap Screw M8×50	1	38	Plug F75×16	6
13.9	Nylon Lock Nut M8	1	39	Select the iron pin group	2
13.1	Flat Head Cap Screw M6×10	8	40	Flat Washer φ44×φ25×4	124
13.11	Button Head Cap Screw M4×4	2	41	Flat Washer φ11×φ20×2	28
14	LOGO Board 696×120×1.5	1	42	Hex Head Bolt M24×120	50
15	Trim Panel 213×200×3	4	43	Nylon Lock Nut M24	60
16	LOGO Board 123×38×1.5	6	44	Nylon Lock Nut M8	4
16		4	45	Socket Head Cap Screw M8×100	4
17	LOGO Board 123×38×1.5			Flat Washer φ9×φ16×1.6	4
	Double Pulley Connection Frame	2	46	riat washer \$9\\$10\1.0	T .
17		2 2	46	Socket Head Cap Screw M4×10	_
17 18	Double Pulley Connection Frame	_			20
17 18 19	Double Pulley Connection Frame Single ulley Connection Frame High Pulley Frame	2	47	Socket Head Cap Screw M4×10	20 16
17 18 19 20 21	Double Pulley Connection Frame Single ulley Connection Frame High Pulley Frame Right Pulley	2 2 1	47 48 49	Socket Head Cap Screw M4×10 Nylon Lock Nut M10 Hex Head Bolt M24×130	20 16 14
17 18 19 20 21 21. 1	Double Pulley Connection Frame Single ulley Connection Frame High Pulley Frame Right Pulley Double Pulley Frame	2 2 1 1	47 48 49 50	Socket Head Cap Screw M4×10 Nylon Lock Nut M10 Hex Head Bolt M24×130 Hex Head Bolt M10×50	20 16 14 12
17 18 19 20 21	Double Pulley Connection Frame Single ulley Connection Frame High Pulley Frame Right Pulley	2 2 1	47 48 49	Socket Head Cap Screw M4×10 Nylon Lock Nut M10 Hex Head Bolt M24×130	20 16 14

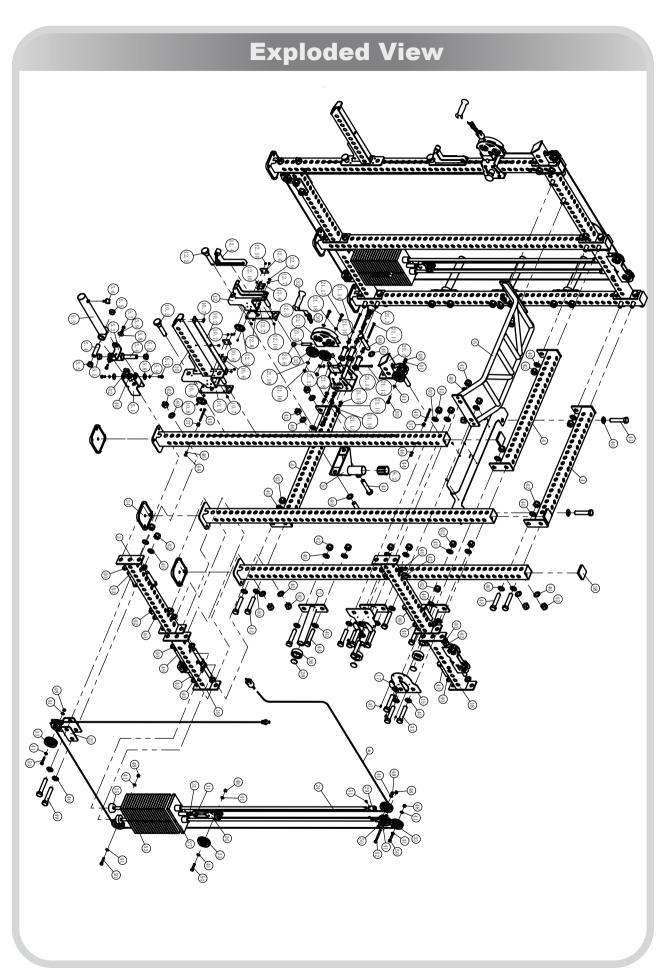

## **Measurement Guide**

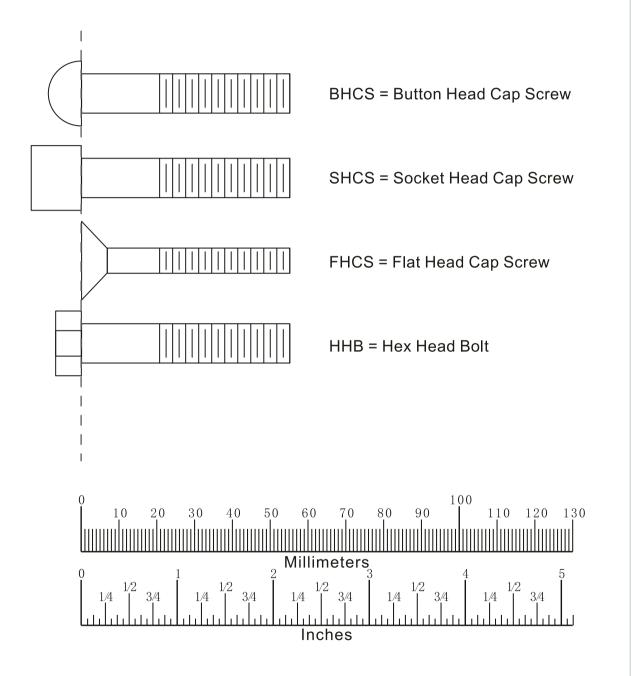

## **Assembly Instructions**


Assembly of the equipment takes professional installers about 2 hours. If this is the first time you have assembled this type of equipment, plan to spend more time. It is strongly recommended to assemble the equipment by professional installers. You may find it quicker, safer, easier to assemble this equipment with the help of a friend, as some of components may be large, heavy or awkward to handle alone. It is important that you assemble your product in a clean, clear, uncluttered area. This will enable you to move around the product while you are fitting components and reduce the possibility of injury during assembly.

## 

As with any assembled part, proper alignment and adjustment is critical. While tightening the fasteners, be sure to leave room for adjustments. Do not fully tighten the fasteners until instructed to do so. Be careful to assemble the components in the sequence presented in this guide.

STEP 1
Note: Hand Tighten Bolts and Nylon Lock Nuts.


Item No.	Description	QTY	Item No.	Description	QTY
1	Adjustable Frame	2	37	Spacer sleeve $\phi 17 \times \phi 8.2 \times 18$	4
2	Upright Frame	4	40	Flat Washer φ44×φ25×4	30
3	Long Cross Brace	2	42	Hex Head Bolt M24×120	12
4	Cross Brace	1	43	Nylon Lock Nut M24	14
5	Cannon Barrel Accessories	1	44	Nylon Lock Nut M8	4
19	Single ulley Connection Frame	2	45	Socket Head Cap Screw M8×100	4
21	Right Pulley assembly	1	46	Flat Washer $\phi 9 \times \phi 16 \times 1.6$	4
23	Left pulley assembly	1	49	Hex Head Bolt M24×130	4

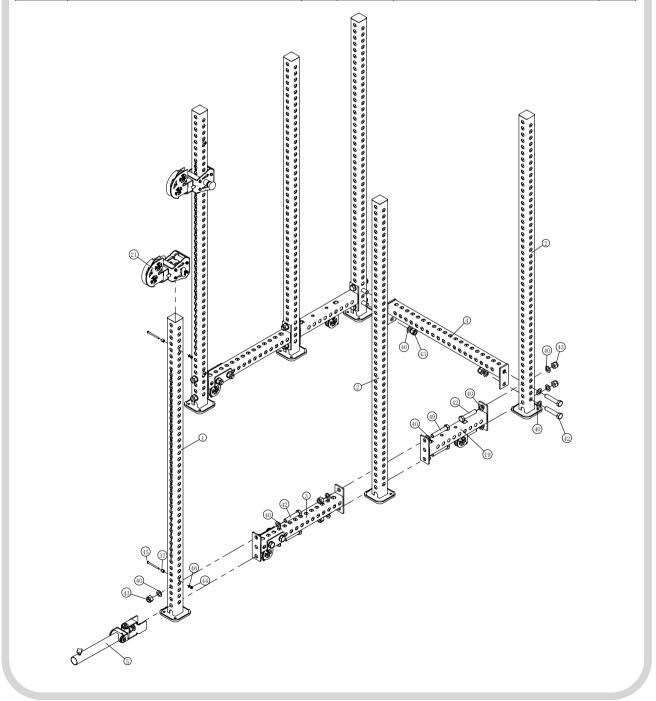

## STEP 2

Note: Hand Tighten Bolts and Nylon Lock Nuts.


Item No.	Description	QTY	Item No.	Description	
3	Long Cross Brace	2 40 Flat Washer φ44×		Flat Washer φ44×φ25×4	54
4	Cross Brace	2	42	Hex Head Bolt M24×120	18
6	Pull Frame	1	43	Nylon Lock Nut M24	26
18	Double Pulley Connection Frame		49	Hex Head Bolt M24×130	6
20	High Pulley Frame	2			

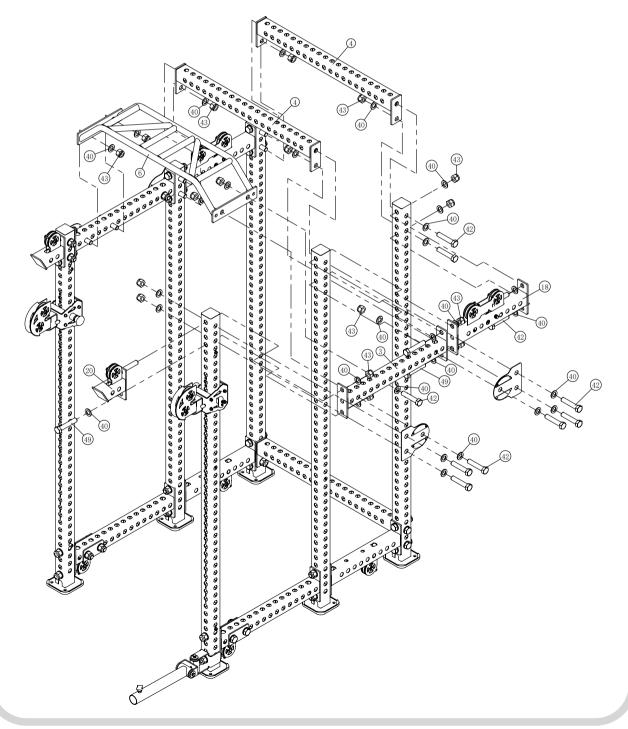

## STEP 3


Note: Hand Tighten Bolts and Nylon Lock Nuts.

Item No.	Description		Item No.	Description	QTY
9	Barbell Placement Rack	1	13	Left Hook	1
10	Right Safety Arm	1	40	Flat Washer φ44×φ25×4	8
11	Left Safety Arm	1	42	Hex Head Bolt M24×120	4
12	Right Hook	1	43	Nylon Lock Nut M24	4

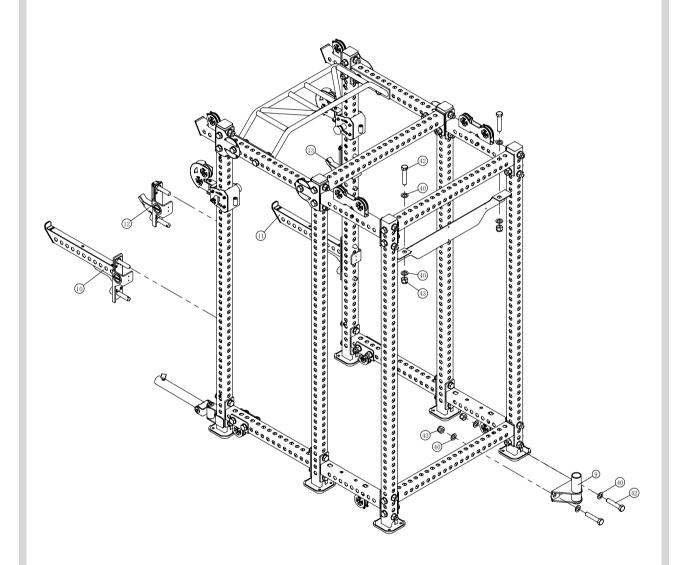

**STEP 4**Note: Wrench Tighten Screws.

Item No.	Description	QTY	Item No.	Description	
7	Barbell Bar Rack	6	35	Rubber pad $\phi$ 63.5× $\phi$ 19×25.4	4
24	Guid Rod φ19×2058	4	39	Select the iron pin group	2
25	Cable	2	40	Flat Washer φ44×φ25×4	24
26	Pulley frame	2	42	Hex Head Bolt M24×120	12
27	Top Plate 5Kg	2	43	Nylon Lock Nut M24	12
32	Tensile sleeve set	2			

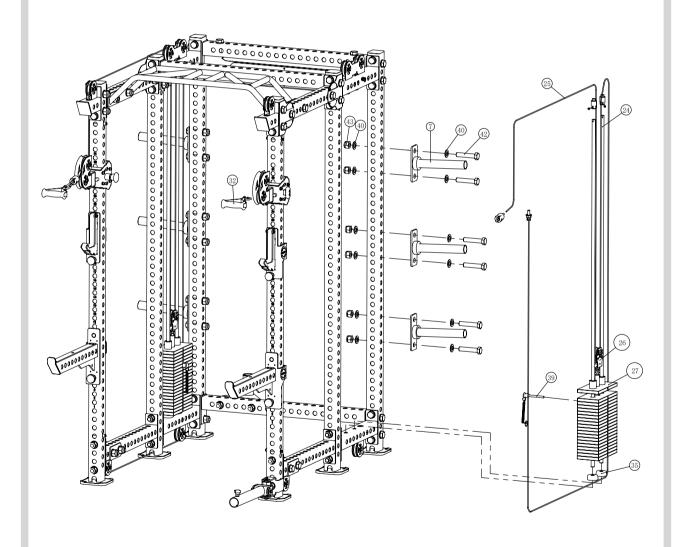

## Maintenance Schedule

ROUTINE	COMMERCIAL MAINTENANCE	HOME MAINTENANCE	LATEST DATE ENTRY				
Inspect; Links, Pull Pins, Snap Locks, Swivels, Weight Stack Pins	DAILY	WEEKLY					
Clean; Upholstery	DAILY	WEEKLY					
Inspect; Cables or Belts and their tension	DAILY	WEEKLY					
Inspect; Accessory Bars, and Handles	WEEKLY	3 MONTHS					
Inspect; All Decals	WEEKLY	3 MONTHS					
Inspect; All Nuts and Bolts, Tighten if needed	WEEKLY	3 MONTHS					
Inspect; Anti-Skid Surface	WEEKLY	3 MONTHS					
Clean & Lubricate; Guide Rods with a Teflon (PTFE) based lubricant (Superlube)	MONTHLY	3 MONTHS					
Lubricate; Seat Sleeves, Turcite Bushings, Linear Bearing	MONTHLY	3 MONTHS					
Clean and Wax; All Glossy Finishes	6 MONTHS	YEARLY					
Repack with Grease; Linear Bearings	6 MONTHS	YEARLY					
Replace; Cables, Belts and Connecting Parts	YEARLY	3 YEARS					_

Your equipment comes with a commercial maintenance decal. For personal, in home use, please follow the home maintenance schedule listed above.

### **General Maintenance Information**

### Links, Pull-Pins, Snap Hooks, Swivels, Weight Stack Pins:

- \* Check all pieces for signs of visible wear or damage.
- \* Check springs in snap hooks and pull-pins for proper tension and alignment.
- \* If the spring sticks or has lost its rigidity, replace it immediately.

### **Upholstery:**

- \* To ensure prolonged upholstery life and proper hygiene, all upholstered pads should be wiped down with a damp cloth after every workout.
- \* Periodically take the time to use a mild soap or an approved vinyl upholstery cleaner to deter the onset of cracking or drying. Avoid using any abrasive cleaners or cleaners not intended for use on vinyl.
- \* Replace ripped or warn upholstery immediately.
- \* Keep sharp or pointed objects clear of all upholstery.

#### Decals:

\* Inspect and familiarize yourself with any safety warnings or other user information posted on each decal.

#### **Nuts and Bolts:**

- \* Inspect all nuts and bolts for any loosening and tighten if needed.
- \* Go through a re-tightening sequence periodically to ensure that all hardware is tensioned proper.

### **Anti-Skid Surfaces:**

\* These surfaces are designed to supply secure footing and need to be replaced if they appear worn or become slippery.

#### **Belts and Cables:**

- \* We uses only high quality belt, and mil-spec cables.
- \* Visually inspect the belts and cables for fraying, cracking, peeling or discoloration.
- \* While the machine is not in use, carefully run your fingers along the belt or cable to feel for thinning or bulging areas.
- \* Replace belts and cables immediately at the first signs of damage or wear. Do not use equipment until belts or cables have been replaced.

#### **Belt and Cable Tension:**

- \* Referring to the Owners Manual, when belts or cables are used check all bolts attachments to be sure they are properly attached.
- \* Check slack in cables and re-adjust cable tension if needed.

### Seat Sleeves, Guide Rods:

- \* Wipe down adjusting tubes with a dust free rag before applying lubricant.
- \* Lubricate seat sleeves and Guide Rods with a Silicon or Teflon based lubricant spray.

### **Linear Bearings:**

\* Referring to the Owners Manual carefully disassemble the bearing from its housing and place a finger full of light grease (lithium, super lube, etc.) into the inside of the bearing. Using your finger, press the grease into the ball-bearings and their tracks. repeat until the ball-bearing tracks are full of grease. Insert the shaft back into the bearing and wipe off excess grease.

### PLEASE KEEP THIS FOR YOUR RECORDS

## Weight Training Tips

Use this manual to guide you through the basic exercises you can perform on your equipment. To gain maximum results and avoid possible injury, consult a fitness professional to develop your complete exercise program.

Always consult your physician before starting any exercise program.

To be successful in your exercise program, it is important to develop an understanding of the basic principles of strength training. Now that you have your equipment, it is only natural that you want to get started immediately. First, determine a set of realistic goals and objectives for yourself. By deciding on an exercise plan that is right for you prior to starting, you will contribute significantly to your success.

Warm up properly before engaging in weight resistance training. Stretching, yoga, jogging, calisthenics or other cardiovascular exercise can help prepare your body for the heavier workload of lifting weights.

Learn how to perform the exercise correctly before using heavy weight. Correct form is important to avoid injury and to ensure that you work the proper muscle groups.

Know your limitations. If you are new to weight training or are embarking on an exercise regimen after a long layoff, start slowly and build foundational strength over a longer period of time.

Pay attention to your breathing. Exhale when you exert is a general rule of thumb. Never hold your breath.